AiM Infotech

Car/Bike Tire temperature sensor

Release 1.03







1

Introduction

This datasheet shows how to install the tire temperature sensor for car/bike applications.

AiM loggers can measure tire temperature connecting to one or more temperature sensors directly connected to the measure points.

Sensor part number is: X05TTS01B0

2

Installation and connection


Use a self-built bracket to install the sensor; place it far from strong heat sources (the exhaust pipe for instance) and from electromagnetic interference sources. The best installation point is the internal part of the fender so to avoid that the sensor get damaged bumping stones or other stuff.



3

Dimensions, pinout and technical characteristics

The drawing here below shows the sensor dimensions in millimetres [inches].

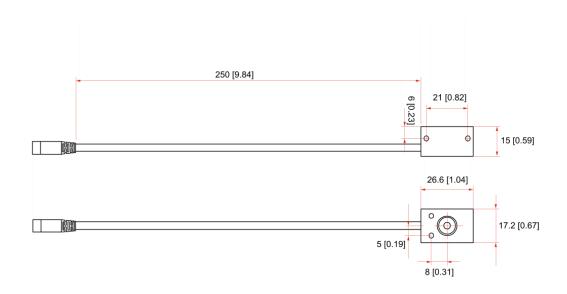

The sensor technical characteristics:

- Output signal: 0-5V
- Field of measure: 35°
- Working range: -20/120°C
- Sensor electrical range:
 - o 820 Mv/-20°C
 - o 3230 Mv/120°C
- Sensor dimensions: 26.6x17.2 mm
- IP rating: IP65
- Sensor cable length: 250 mm



4

Extension cables

The sensor is sold with a 25 cm cable and standard lengths extension cables are available as optional; it is also possible to ask for specific length extension cables.

Extension cables part numbers change according to their length and to the device the sensor is to be connected to.

Mandatory extension cable for connection with:

- EVO4
- EVO4S
- Channel Expansion
- MyChron Expansion

Part numbers:

V02PCB05BTXG – cable length: 500 mm V02PCB10BTXG – cable length: 1000 mm V02PCB15BTXG – cable length: 1500 mm V02PCB20BTXG – cable length: 2000 mm V02PCB25BTXG – cable length: 2500 mm V02PCB30BTXG – cable length: 3000 mm



- MXG
- MXS
- MXL2
- EVO5
- MXL/Pista/Pro05

Part numbers:

V02PCB05B – cable length: 500mm V02PCB10B – cable length: 1000mm V02PCB15B – cable length: 1500mm V02PCB20B – cable length: 2000mm V02PCB25B – cable length: 2500mm V02PCB30B – cable length: 3000mm



